

Spare Parts Listings + Disassembly Diagrams

C3300/C3400/C3450




Revision 1

Parts Layout

Rev.	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
6	C3400/3300	2	43208101	Frame-Assy. -OP (PX732)	1	2	4	8	ODA, OEL, AOS		-
6	C3400/3300		43378002	PX732 Belt Unit (OEL)	1	10	20	40	OEL Pack in box		-
6	C3400/3300	13	43192201	Plate Assy. -Base	1	2	4	8			-
	C3400/3300	14	43192601	Cassette Assy	1	1	2	4			-
	C3400/3300	15	42088801	Frame-Separation-Assy.	1	3	6	12			-
	C3400/3300	16	42089001	Spring-Separation	1	3	6	12			-
6	C3400/3300	17	43194101	Plate Assy-Side-R (PX732)	1	2	4	8	C3400		-
6	C3400/3300		43194102	Plate Assy-Side-R (PX732)	1	2	4	8	C3300		-
6	C3400/3300	18	43200101	Plate Assy-Side-L (PX732)	1	2	4	8			-
6	C3400/3300	19	43362201	ACINLET-SW-JST3P	1	1	2	4	ACINLET-SWCord		-
	C3400/3300	21	43361901	CONN Cord-HRS12P-MOLEX10P	1	1	2	4	HeaterAC/IFCord		-
6	C3400/3300	22	42062401	Gear-Idle-Belt (Z20-12)	1	1	2	4			-
6	C3400/3300	23	43206101	Eject Assy. (PX732)	1	2	4	8	C3400		-
6	C3400/3300		43206102	Eject Assy. (PX732Ln)	1	2	4	8	C3300		-
6	C3400/3300	24	43204101	Sensor Assy. -Color-Regis	1	2	4	8			-
	C3400/3300	25	2381028P0032	SMCD-17-210BD(1.0)	1	2	4	8	RearSensor_FFC		-
	C3400/3300	26	43214301	Spring-Torsion (L)	1	1	2	4			-
	C3400/3300	27	43214401	Spring-Torsion (R)	1	1	2	4			-
	C3400/3300	28	43207401	Shaft-Liftup	1	1	2	4			-
	C3400/3300	29	42060701	Bush	1	1	2	4			-
	C3400/3300	30	42066701	Gear-Planet-UP-L	1	1	2	4			-
6	C3400/3300	33	43209301	Feeder-Assy. -Regist	1	2	4	8			-
6	C3400/3300	34	43035201	PWR unit-High Voltage Purchase spec.	1	2	4	8	HighVoltage		-
6	C3400/3300	35	2381028P0034	SMCD-12-180BD(1.0) CONN PAR-	1	2	4	8	HighVoltage_FFC		-
	C3400/3300		43505401	PWR unit-ACDC Switch	1	2	4	8	230V		-
3	C3400/3300	37	43198901	Motor-FAN (80)	1	1	2	4	FUSER		-
	C3400/3300	38	43087201	BLA-1 PCB-Assy. Maintenance Spec.	1	2	4	8	C3400Board-PUCU		-
	C3400/3300		43087202	BLA-2 PCB-Assy. Maintenance Spec.	1	2	4	8	C3300Board-PUCU		-
7	C3450		43087203	BLA-1PCB-Assy. Maintenance Spec.	1	2	4	8	C3450Board-PUCU	A	-
	C3400/3300	40	43215201	Cover-Rear	1	1	2	4			-
	C3400/3300	41	43215301	Cover-FaceUP	1	1	2	4			-
	C3400/3300	42	43215401	Cover-FaceUP-Sub	1	1	2	4			-
	C3400/3300	43	43215601	Cover-Side (R)	1	1	2	4			-
	C3400/3300	44	43215501	Cover-Side (L)	1	1	2	4			-
	C3400/3300	45	43209201	Cover-Front	1	1	2	4			-
6	C3400/3300	46	43210701	Cover-Assy. -Manualfee	1	1	2	4	C3400 ODA, OEL, AOS, CHN, TWN, KOREA		-
4	C3400/3300		43210702	Cover-Assy. -Manualfee	1	1	2	4	C3400_JPN / C3300		-
	C3400/3300	47	43324601	Lever-Assy. -Front-Loc	1	1	2	4	600DPI		-
	C3400/3300	48	43295201	LED Head Unit-51STA	4	2	4	8			-
	C3400/3300	49	43197201	Plate-Lockout-ID	1	1	2	4			-
6	C3400/3300	50	43191801	Plate-name 732Ln	1	1	2	4	C3300 OEL, AOS		-
6	C3400/3300		43191802	Plate-name 732n	1	1	2	4	C3400 ODA, OEL, AOS, JPN		-
7	C3450		43191808	Plate-name 732n	1	1	2	4	C3450 OEL	A	-
	C3400/3300	51	43216801	Plate-Logo	1	1	2	4			-
	C3400/3300	56	43215701	Cover-Rear-Bottom	1	1	2	4			-


Parts Layout (C3400/3300/3450)

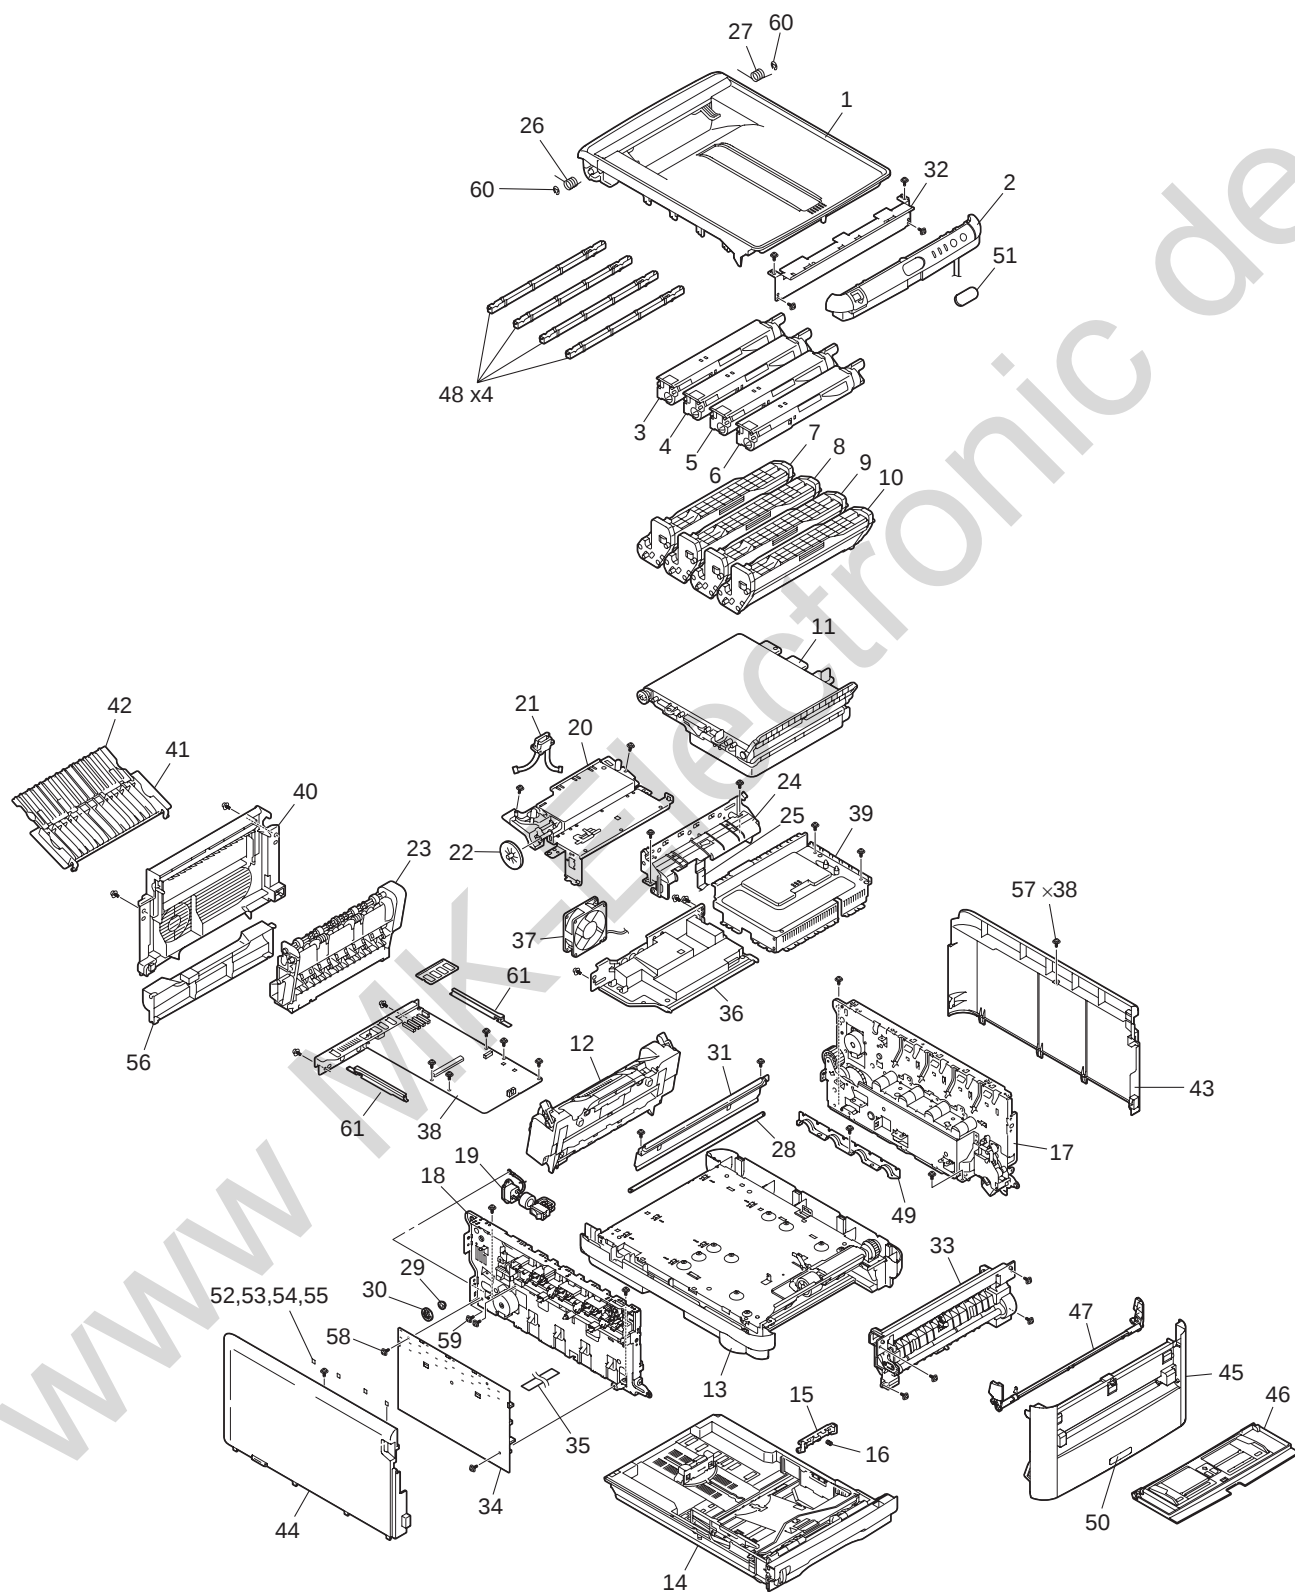

Top-Cover-Assy

Rev.	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
	Top-Cover-Ass	2	43214801	Lever-Stack-L	1	1	2	4	C3400		-
	Top-Cover-Ass	3	43214901	Lever-Stack-R	1	1	2	4	C3400		-
	Top-Cover-Ass	6	43508801	RFID-UNIT Assy. -(Main	1	2	4	8	Board-RFIDR/W, Concurrent;a, b, c		-
	Top-Cover-Ass	11	43212901	Holder-Head (SH)	4	1	2	4			-
	Top-Cover-Ass	12	43213001	Plate-FG-Head-L (SH)	4	1	2	4			-
	Top-Cover-Ass	13	43213101	Plate-FG-Head-R (SH)	4	1	2	4			-
6	Top-Cover-Ass	15	43501005	Push-Nut (SPN-2. 6 A. C.)	8	1	2	4			-
	Top-Cover-Ass	16	43213301	Cable-Assy. -Head	1	1	2	4	LED-HEAD-FFC RFID-FFC		-
	Top-Cover-Ass	17	43214001	Cover-Top	1	1	2	4			-
	Top-Cover-Ass	18	43214101	Cover-Top (Sub)	1	1	2	4			-
	Top-Cover-Ass	20	43214501	Cover-Hinge (L)	1	1	2	4			-
	Top-Cover-Ass	21	43214601	Cover-Hinge (R)	1	1	2	4			-

Top-Cover-Assy

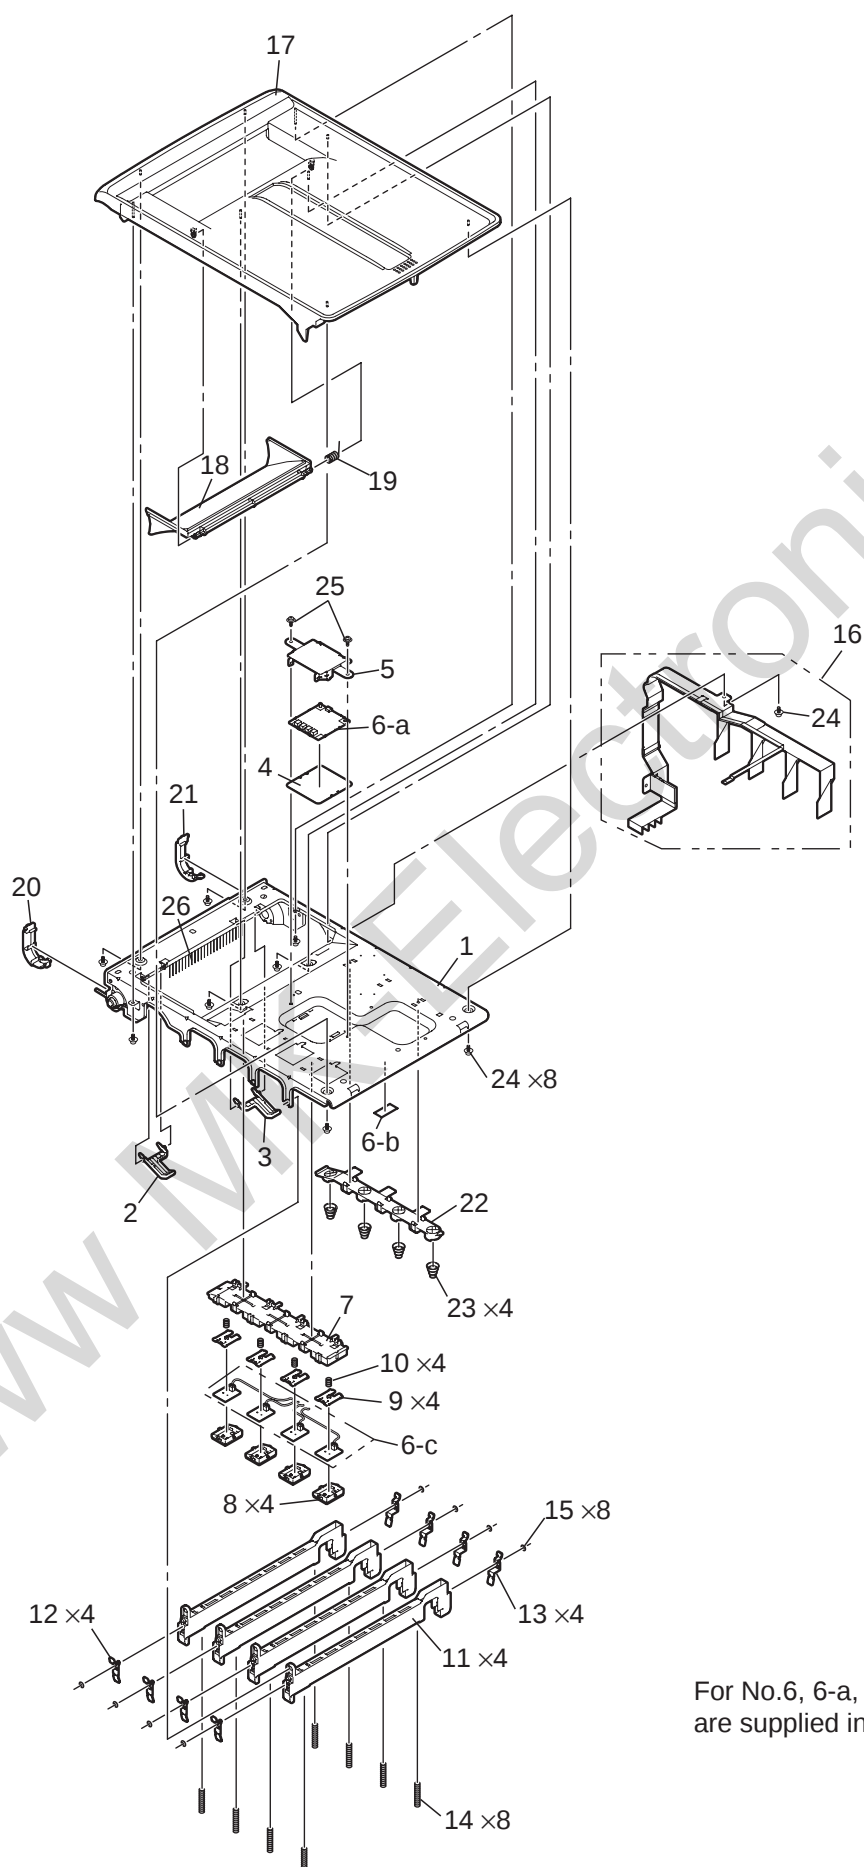


For No.6, 6-a, 6-b and 6-c
are supplied in one set.

Control-Panel-Assy

Rev.	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
	Control-Panel	8	43135001	OR-Board WHI	1	2	4	8	Board-Opepanel		-
	Control-Panel	9	2381028P0031	SMCD-7-400BD (1.0)	1	2	4	8	OperationPanel_FFC		-

www MK-Electronic.de

Control-Panel-Assy

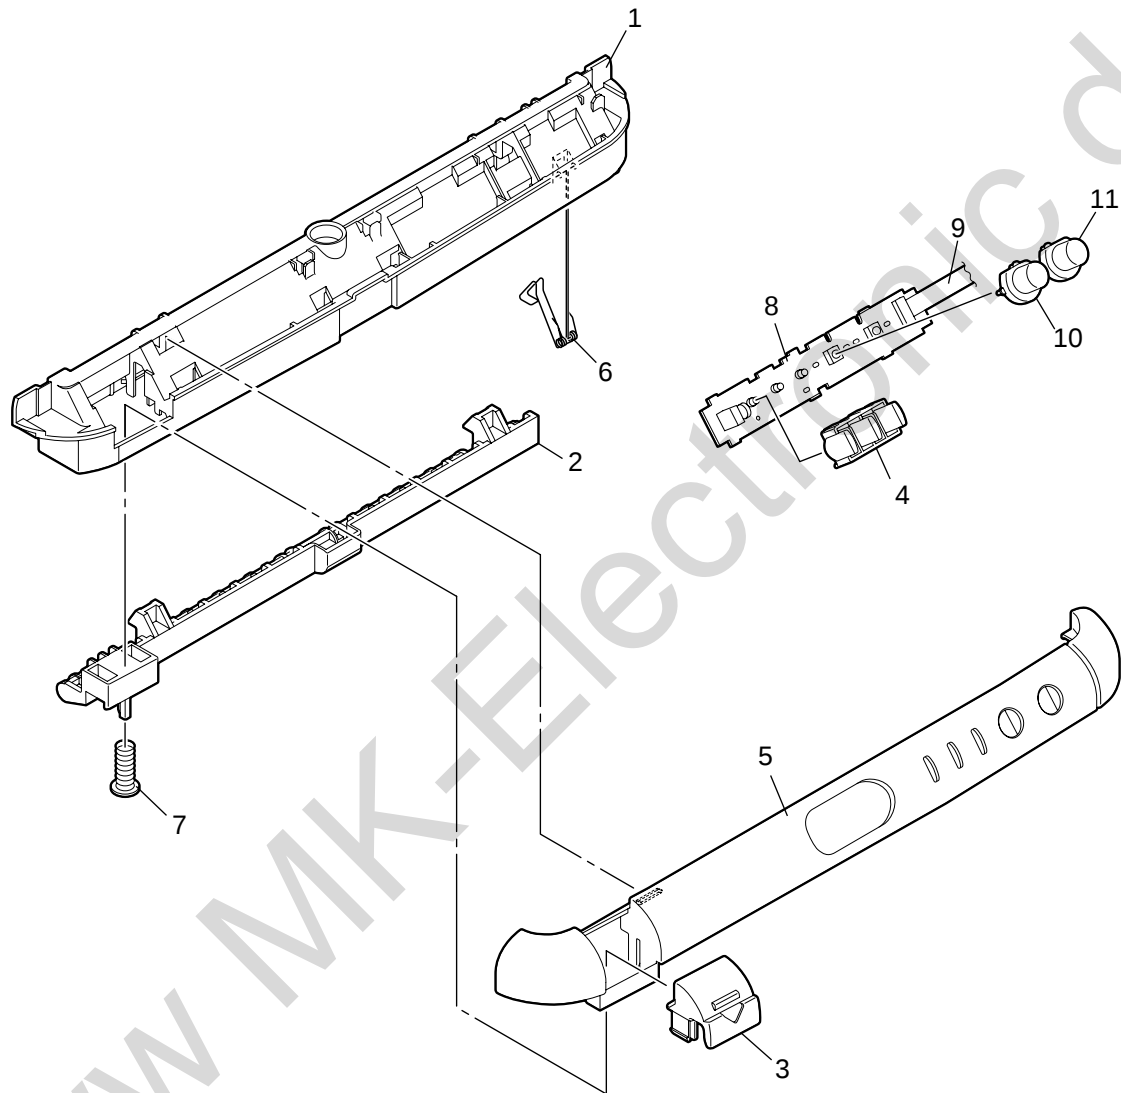

Feeder_Unit

Rev.	Unit Name	No.	Part No.	Part Name	Q' ty /Unit	Recommended Q' ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
	Feeder_Unit	8	43135401	OR-Board-MIP	1	2	4	8	Board-FrontSensor		-
	Feeder_Unit	10	43361401	CONN Cord-AMP5P-AMP5P	1	1	2	4	FrontSensorCord		-
	Feeder_Unit	11	43209601	Cover-SNS	1	1	2	4			-

www MK-Electronic.de

Feeder_Unit

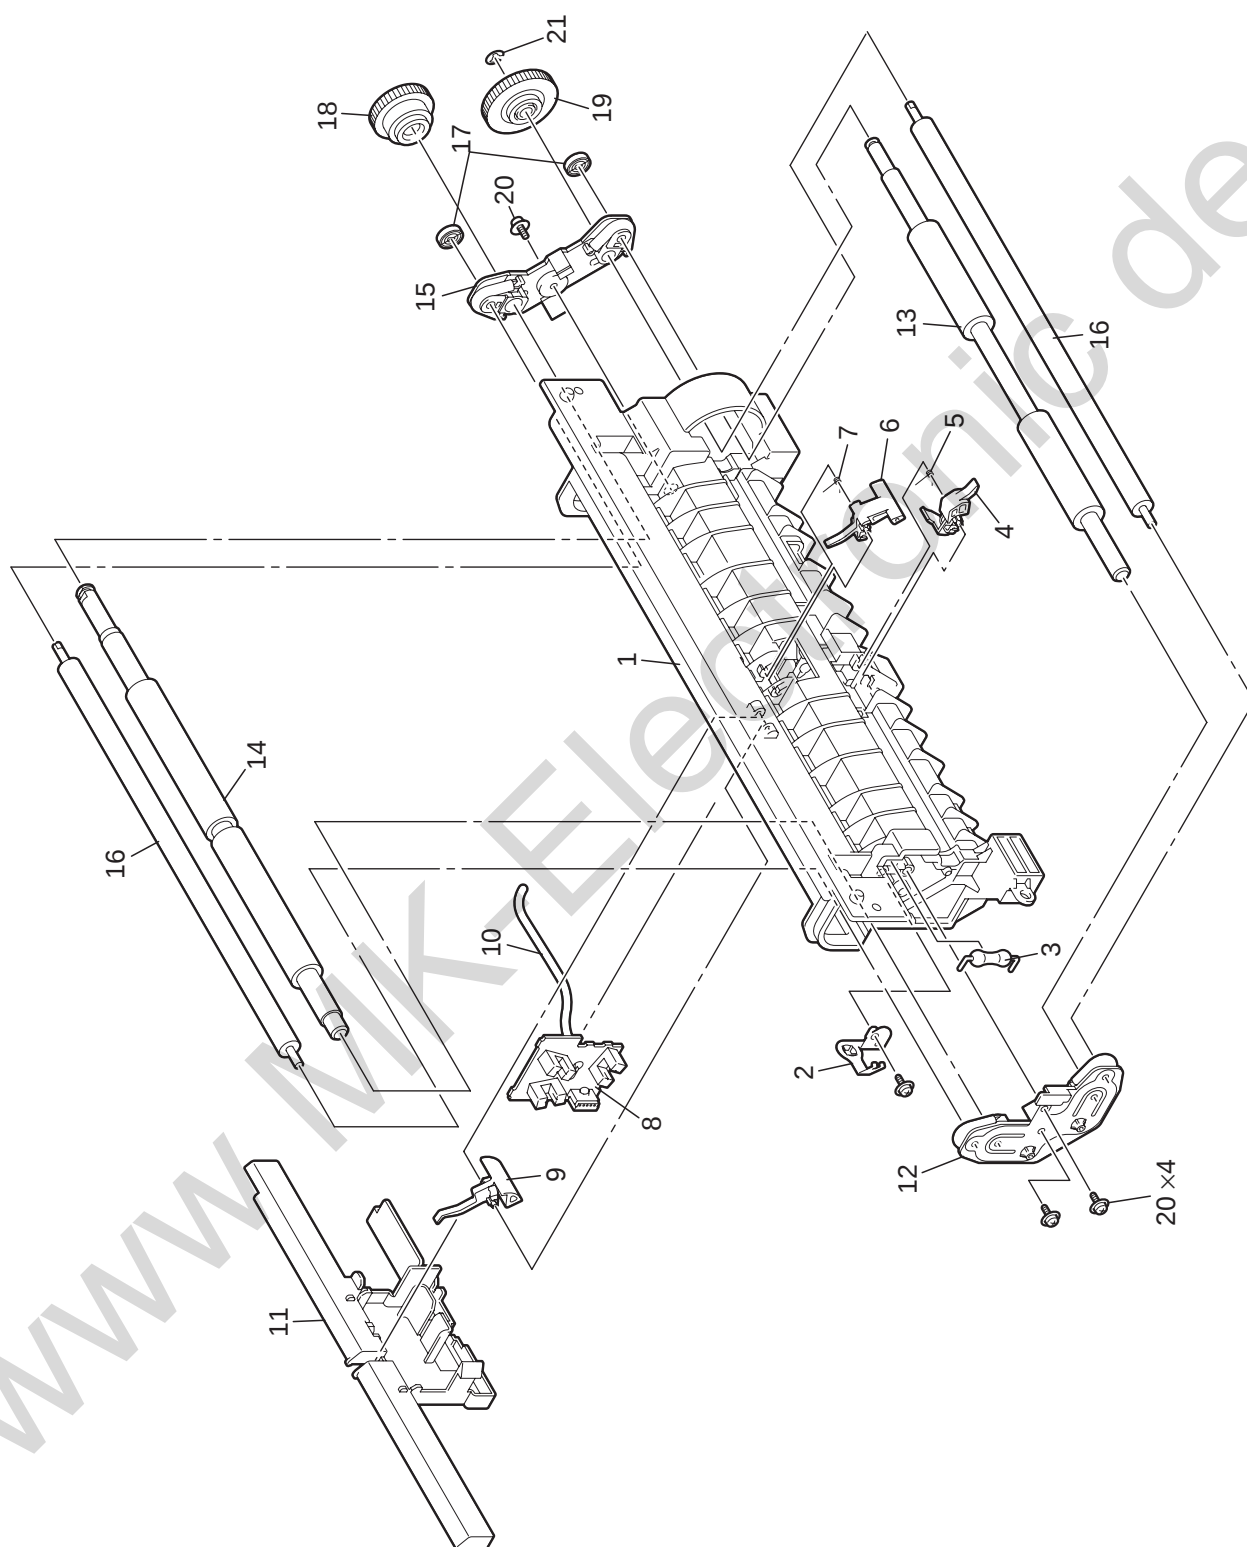


Plate Assy-Side_R

Rev.	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
6	Plate Assy-Si	4	43614901	OR-Board-PRS	1	2	4	8	Board-TonerSensor	A	-
6	Plate Assy-Si	5	2381028P0030	SMCD-10-280BD(1.0) CONN PAR-	1	2	4	8	TonerSensor_FFC		-
	Plate Assy-Si	7	43195101	Motor-DC-ID-M58	1	1	2	4			-
	Plate Assy-Si	8	43361601	CONN Cord-AMP10P- AMP10P	1	1	2	4	DC-IDMotorCord		-
6	Plate Assy-Si	9	43353101	OR-Motor-Pulse-Liftup	1	1	2	4			-
	Plate Assy-Si	11	43196201	Gear-Assy. -Planet	1	1	2	4	Fuser/周辺		-
	Plate Assy-Si	12	43196601	Gear-Idle-Heat (Z14-10)	1	1	2	4	Fuser/周辺		-
	Plate Assy-Si	13	43196701	Gear-Idle-Z35	1	1	2	4	Fuser/周辺		-
6	Plate Assy-Si	19	43353001	OR-Motor-Pulse-HOP	1	1	2	4			-
	Plate Assy-Si	20	43361501	CONN Cord-AMP4P-AMP4P	1	1	2	4	HoppingMotorCord		-
	Plate Assy-Si	21	42058303	Solenoid	1	1	2	4			G
	Plate Assy-Si	23	43197801	Motor-Pulse-Fuser	1	1	2	4	C3400		-
6	Plate Assy-Side		43352101	OR-Motor-Pulse-Fuser	1	1	2	4	C3300		-
	Plate Assy-Si	24	43362301	CONN Cord-JST4P-JST4P	1	1	2	4	C3300HeaterMotorCord		-

Plate Assy-Side_R


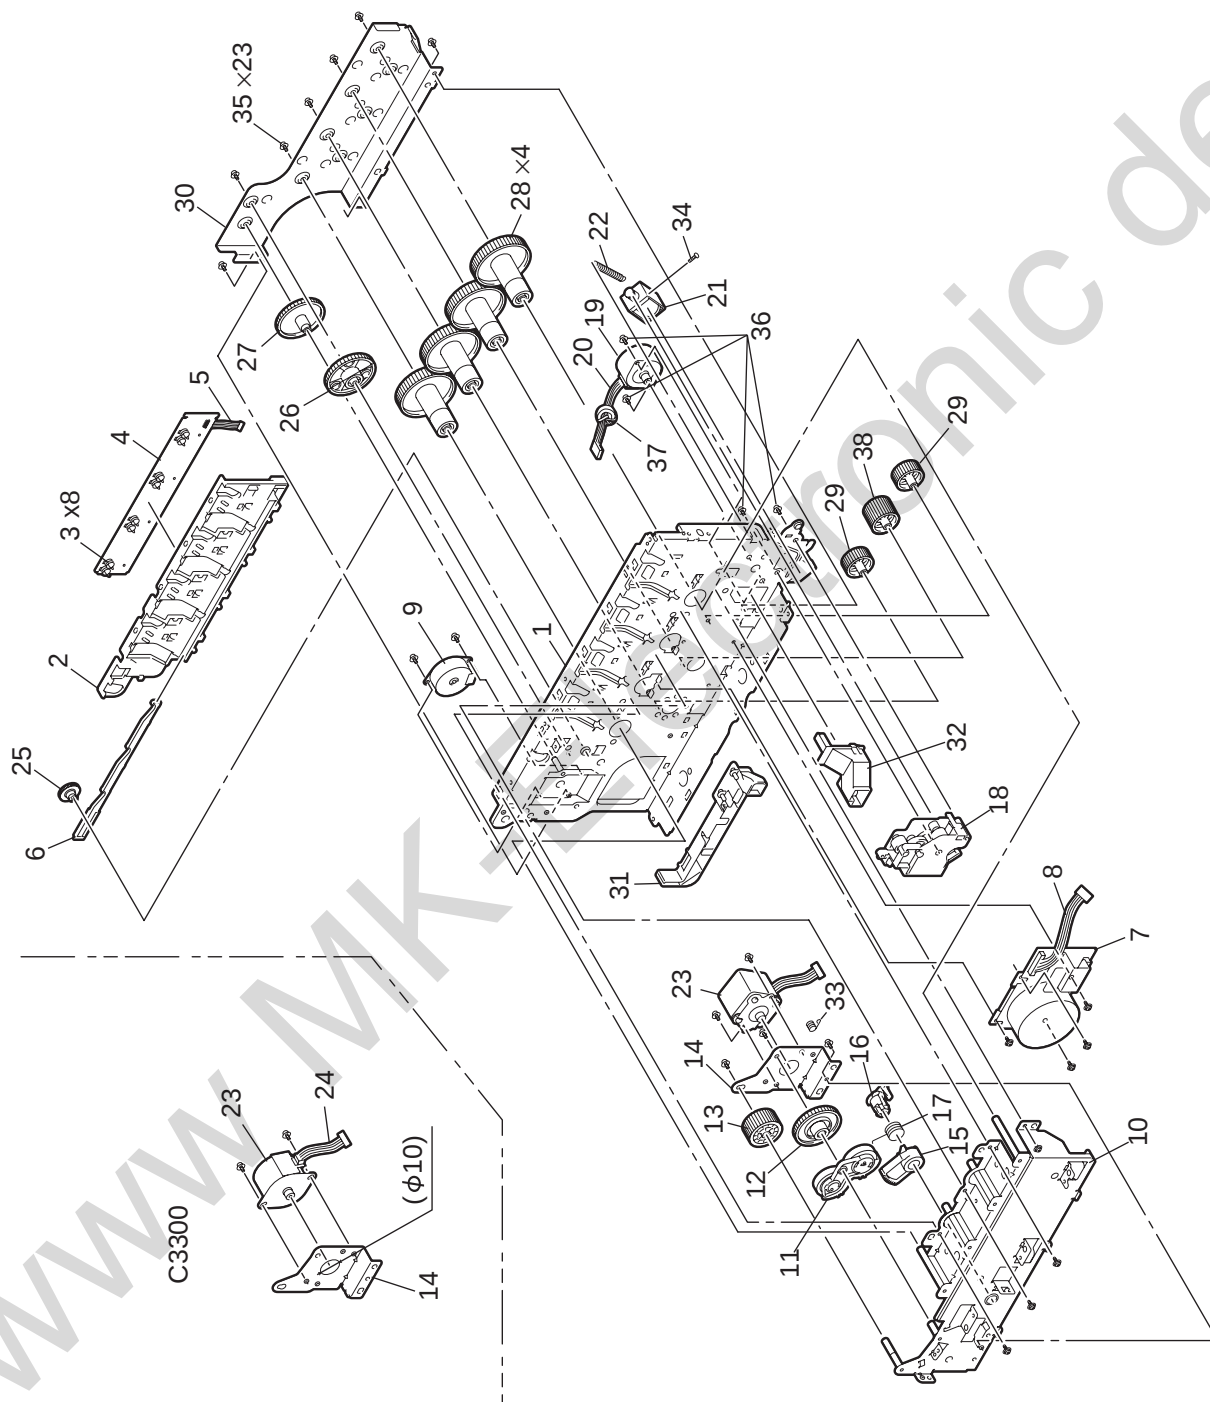


Plate Assy-Side_L

Rev.	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
6	Plate Assy-Si	2	43352901	OR-Motor-Pulse-Belt	1	1	2	4			-
	Plate Assy-Si	4	43415601	Microswitch Assy.-PX732	1	2	4	8	CoverOpenSwitchAssy		-
	Plate Assy-Si	5	43201001	Link-LiftUp-L	1	1	2	4			-
	Plate Assy-Si	7	43361502	CONN Cord-AMP4P-AMP4P	1	1	2	4	BeltMotorCord		-

www MK-Electronic.de


Plate Assy-Side_L

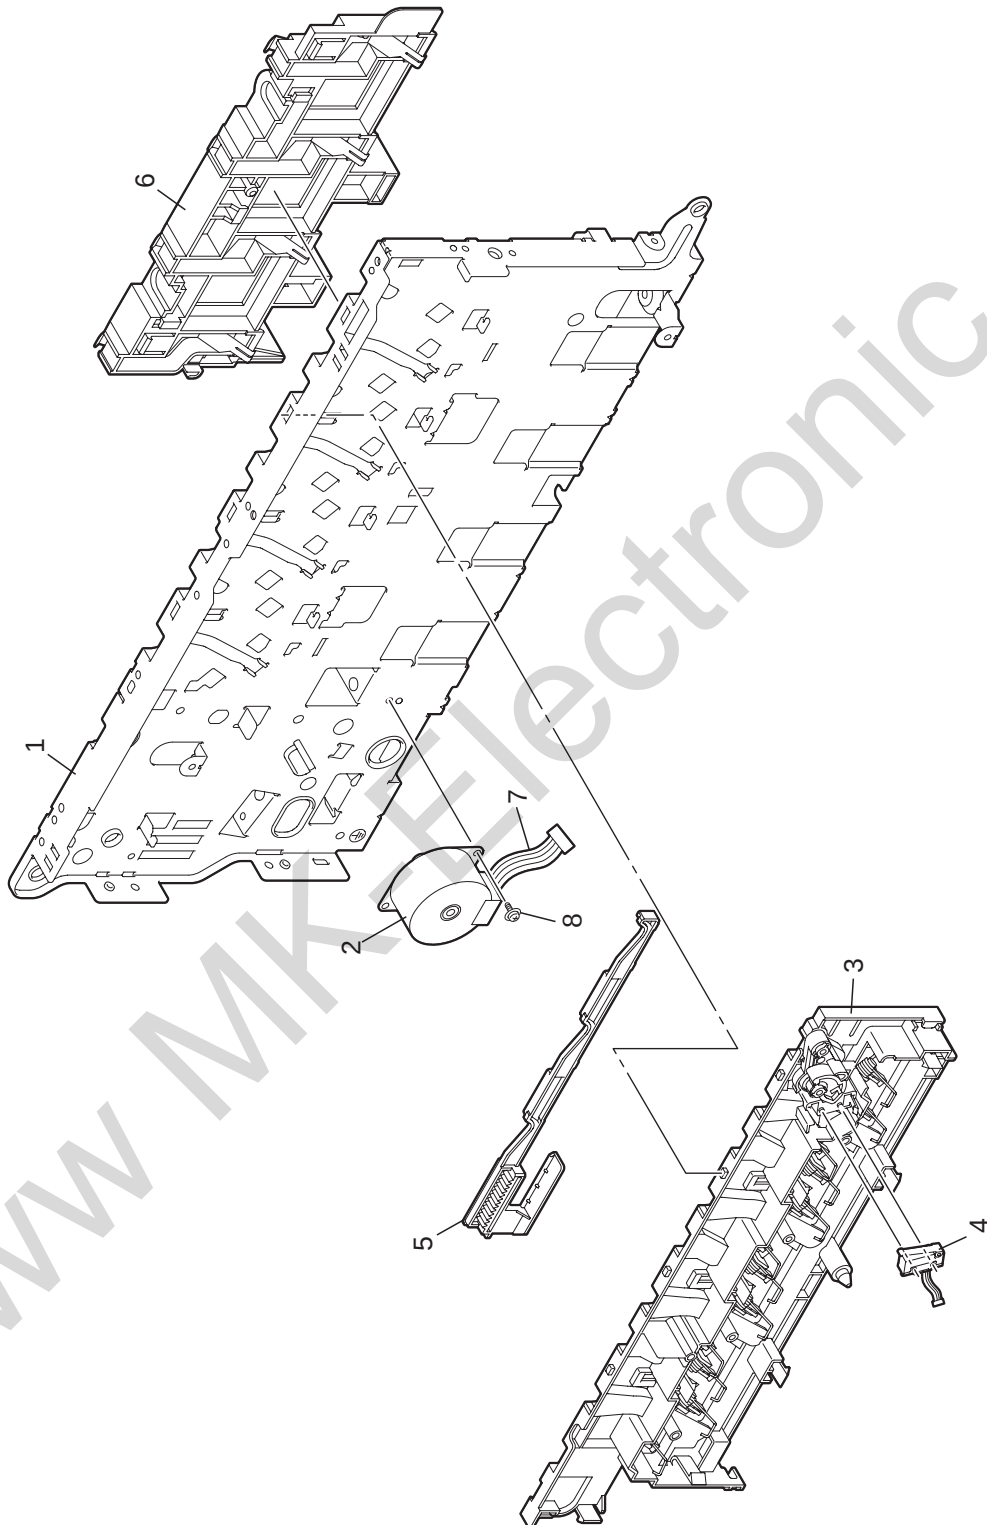

Sensor_Assy-Color_Regist

Rev.	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
	Sensor_Assy-C	2	43135301	OR-Board-ZAK	1	2	4	8	Board-RearSensor		-
	Sensor_Assy-C	4	5654200P0001	GP2TC2J000F	1	3	6	12	DensitySensor		G
6	Sensor_Assy-C	5	43361701	CONN Cord-MOLEX5P-MOLEX5P	1	1	2	4	DensitySensorCord		-

Sensor_Assy-Color_Regist

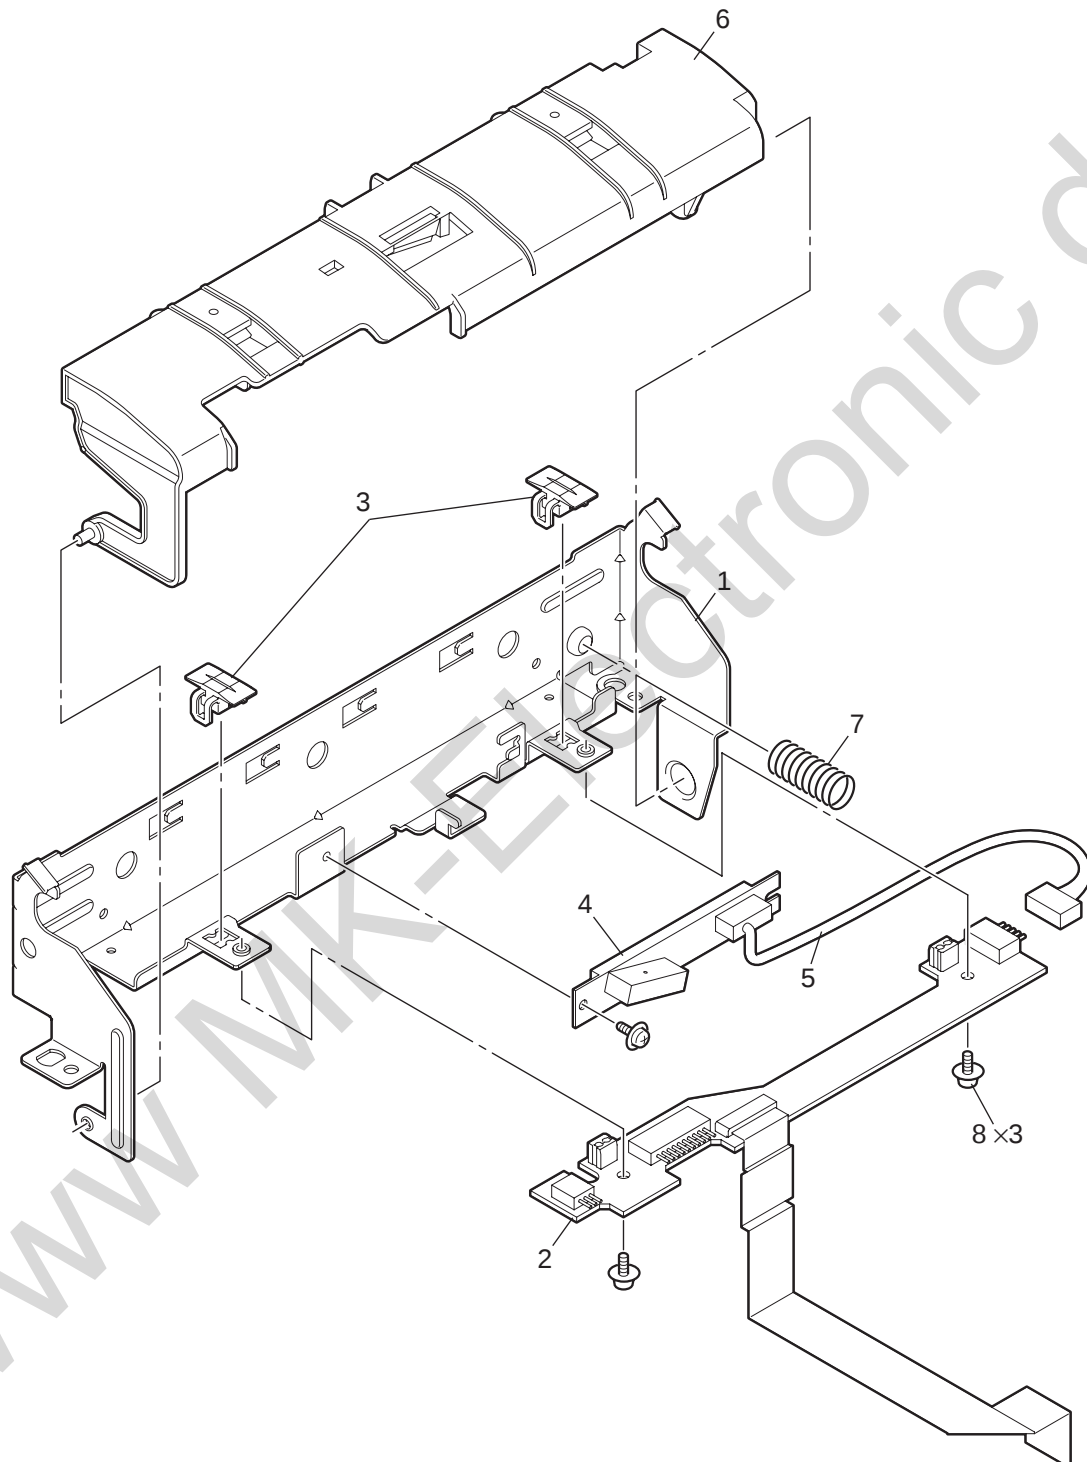


Base-Assy

Rev.	Unit Name	No.	Part No.	Part Name	Q' ty /Unit	Recommended Q' ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
	Base-Assy	11	43334801	Roller Assy. -Sub	1	1	2	4			-
	Base-Assy	23	43334901	Roller Assy. -Hopping	1	1	2	4			-

www MK-Electronic.de

Base-Assy

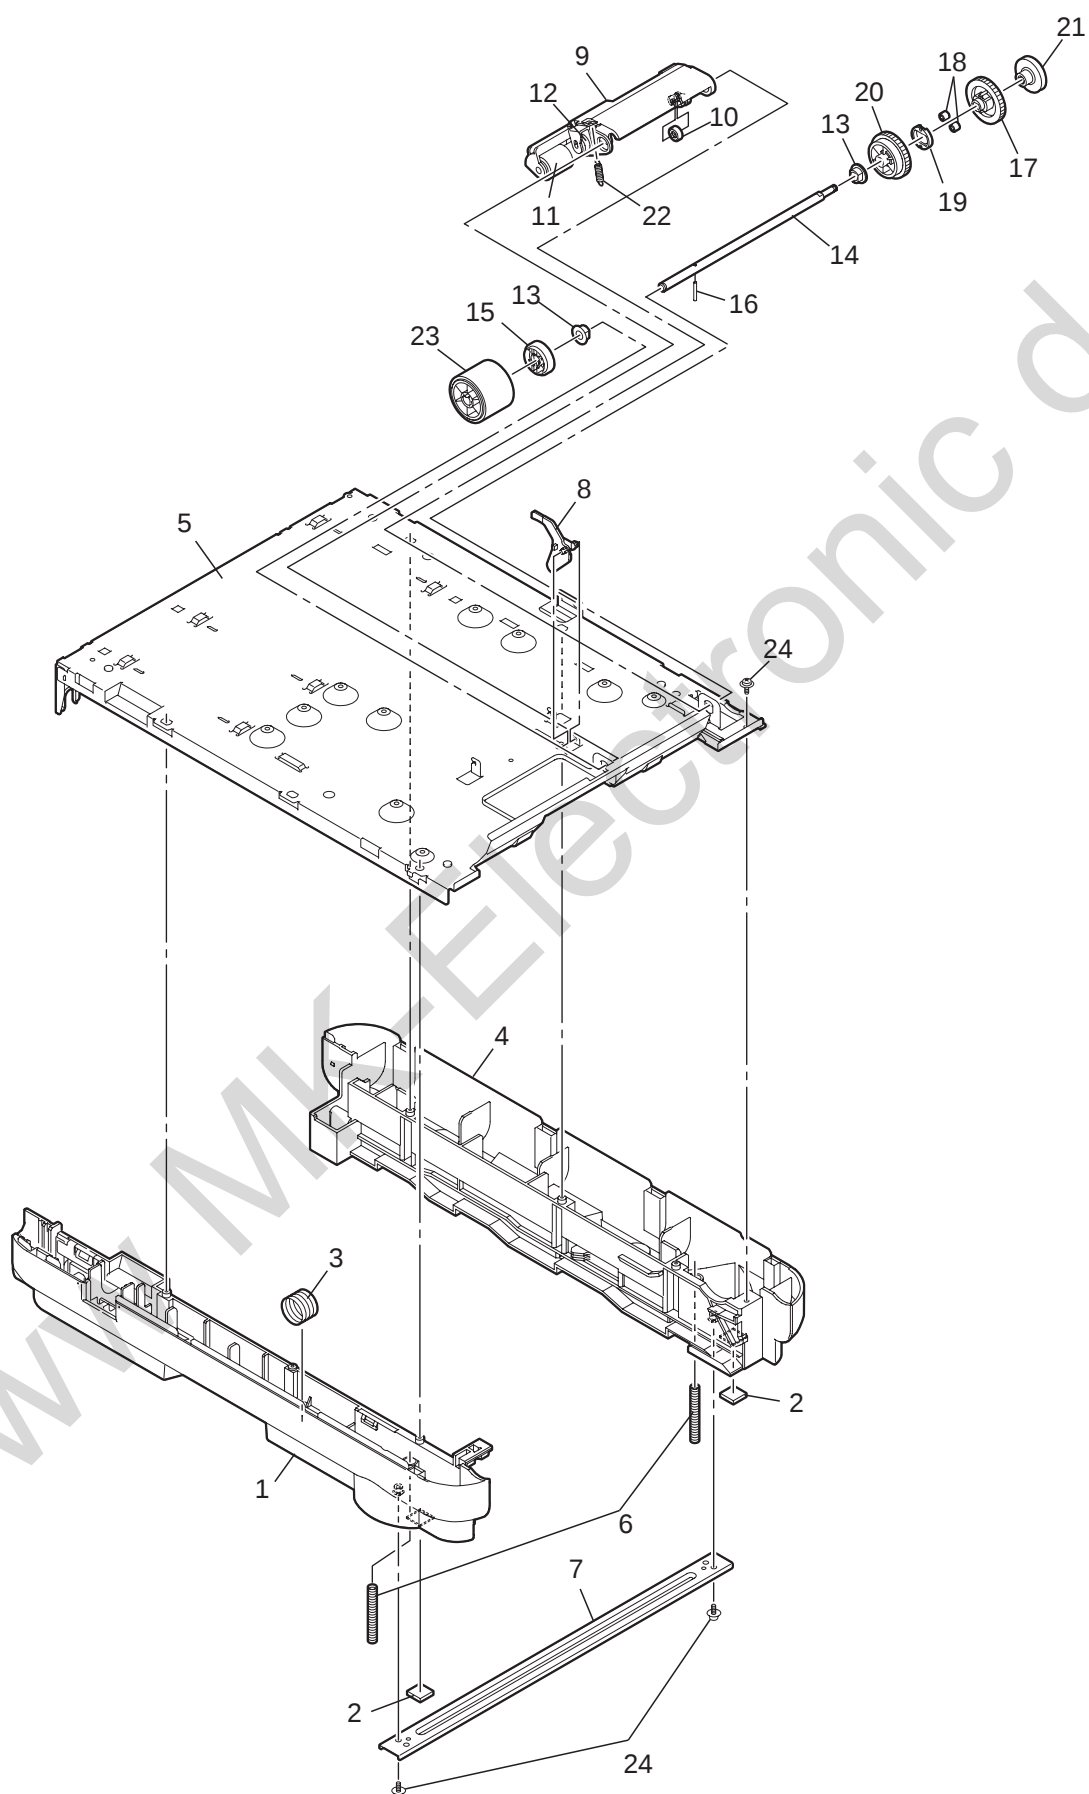

Eject-Assy

Rev.	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Del /Add	Remarks for environment
						per 500	per 1000	per 2000			
	Eject-Assy	2	43206401	Lever-Eject-Sensor	1	1	2	4			-
	Eject-Assy	4	40135301	Photo-Interrupter	1	1	2	4	ExitSensor		G
	Eject-Assy	5	43361801	CONN Cord-AMP3P-AMP3P	1	1	2	4	ExitSensorCord		-
6	Eject-Assy	10	43649701	Sponge-Roller-FD	2	2	4	8		A	-
	Eject-Assy	11	43206901	Shaft Assy.-Eject (FU	1	1	2	4			-
	Eject-Assy	12	43207201	Shaft Assy.-Eject (FD	1	1	2	4	C3400		-
	Eject-Assy		43207202	Shaft Assy.-Eject (FD	1	1	2	4	C3300		-

www MK-Electronic.de

Eject-Assy

